





BKC35D2

ANTI-VIBRATION MOUNT

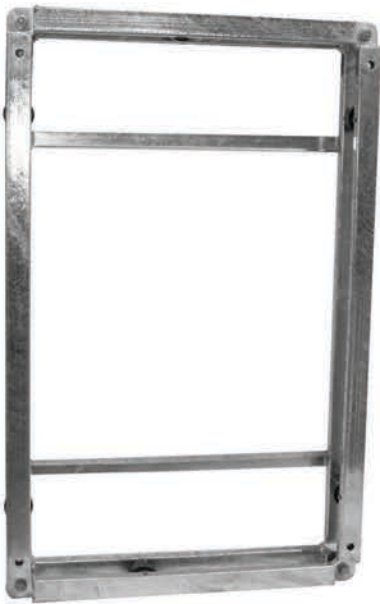

The Anti-Vibration mount is used to prevent vibration from the CHP from reaching the building, and to reduce the noise level caused by vibration. Installation is necessary when the unit is installed on a roof, indoors in an area with rooms/floors underneath or in certain basements.

CHP Basic Flow

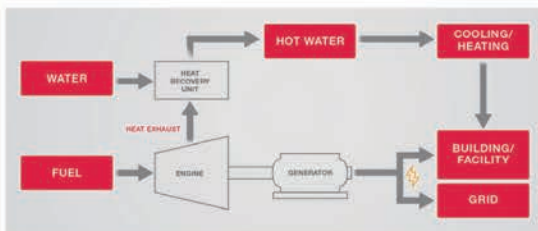


MODEL	BKC35D2
Model Description	Anti-Vibration Mount
Applicable CP Models	CP35D2
Dimensions	68.9 x 30.3 x 5.4 inches (1750 x 770 x 137 mm)
Weight	93lbs (42.6kg) Mount 39.2lbs (17.8kg)
Surface Treatment	Hot Dip Galvanizing
Isolator	Coil Spring 8 PiecesL CMU77-108 (108 n/mm)
Stabilizer / Earthquake-Proof Stoppers	4 sets, Hot Dip Galvanizing Design Seismic Coefficient: Horizontal 2.0 Vertical 1.0
Others	Part Number Label Front Label
Accessories	Hexagon Mountin Bolts: M12 x 70L (2N, W, KW)
	Square Washers for Foundation Bolts (for M12) 4 ets Each, Hot Dip Galvianizing
	Instruction Manual
Standard Warranty	2 Years / 15,000 Hours




BKC35D2

ANTI-VIBRATION MOUNT


<Dimensions>

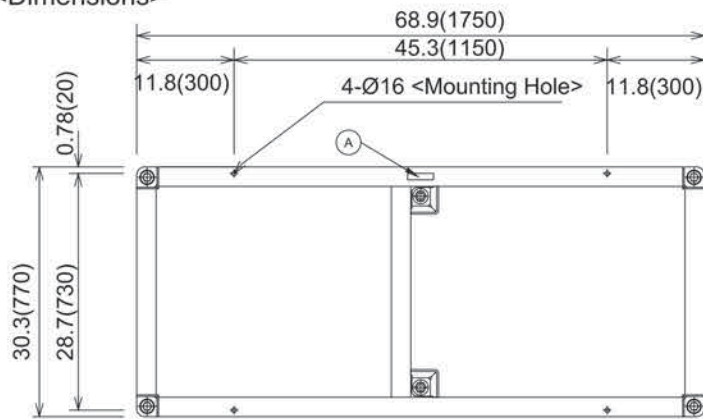

A. Label "Hot water piping Side"

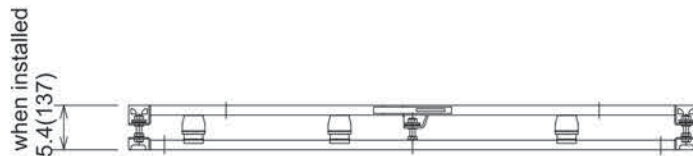

<Anchor Bolt>

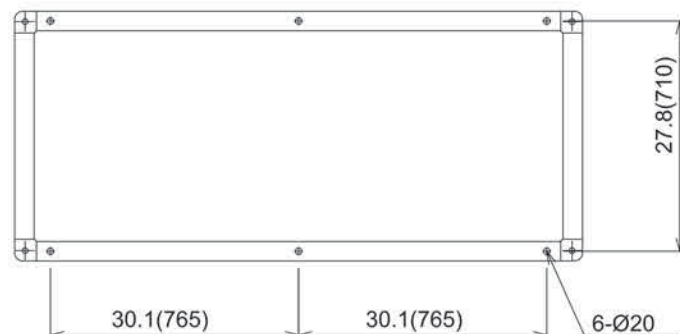

NOTE: Due to YANMAR's ongoing commitment to quality, specifications, ratings and dimensions subject to change without notice. Improper installation, adjustment, alteration, service or maintenance can cause property