



Submittal Data Sheet

BRC1E73 - Navigation Remote Controller

Model Compatibility:

For use with the following VRV indoor unit models: FXAQ, FXDQ, FXEQ, FXFQ, FXHQ, FXLQ, FXMQ, FXMQ_MF, FXNQ, FXTQ, FXUQ, FXZQ

Specifications:


| | |
|--------------------------|--|
| Model | BRC1E73 |
| Description | Navigation Remote Controller |
| Maximum Connections | 16 indoor units |
| Communication Wire | 18AWG-2, No polarity Stranded, Non-shielded |
| Total Wiring Length | 1,640 ft. (500 m) |
| Communication Protocol | Daikin Proprietary P1P2 protocol |
| Power | 16VDC supplied by Indoor unit (1.58VA maximum) |
| Comfort Setpoint Range | 60 to 90 °F (16 to 32 °C) |
| Setback Setpoint Range | 40 to 95 °F (5 to 35 °C) |
| Operating Temp Range | 14 to 122 °F (-10 to 50 °C) |
| Operating Humidity Range | 75% or less (RH) (w/o condensation) |
| Dimensions (WxHxD) | 4.72x4.72x0.75 inch (120x120x19 mm) |
| Weight (Mass) | 0.42 lbs. (0.19 kg) |

Product Image:


1 of 3 display options – Detailed display shown



Dimensions:

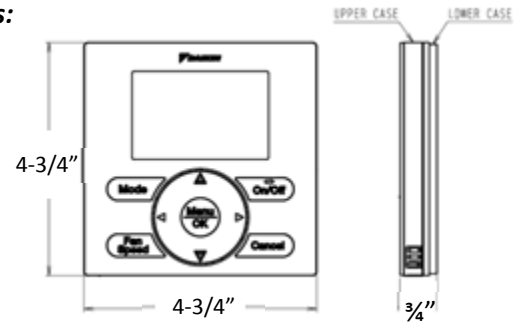

Group Control:

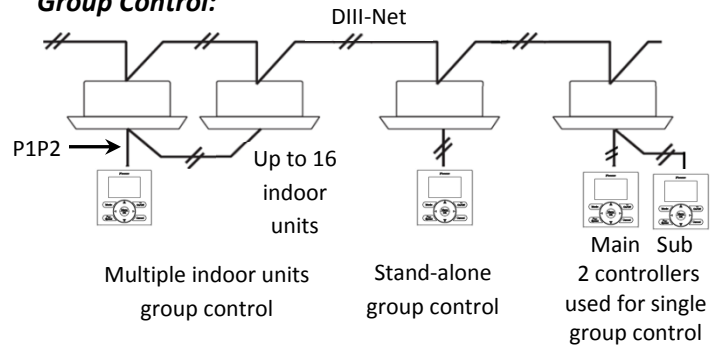

Daikin North America LLC, 5151 San Felipe Suite 500, Houston, TX 77056

Daikin North America LLC Controls Engineering Department Generated Submittal Data

www.daikinac.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)