


For use with the following Daikin VRV Models: FXFQ; FXHQ; FXLQ; FXMQ; FXNQ; FXSQ; FXDQ; FXAQ; FXOQ

Remote controller wiring for transmission for a simplified remote controller (BRC2A71) is the same as that of a standard remote controller (BRC1D71). Because the functions of the simplified remote controller are limited, it is recommended using in combination with a central remote controller.

FEATURES / BENEFITS	
	<ul style="list-style-type: none"> 1 group/maximum of 16 units controllable. Simple, compact and easy-to-operate unit. Suitable for use in hotel bedrooms.

OPERATION	Start/Stop
	Operation Mode
	Temperature Setting
	60°F – 90°F Set Point Range
	Fan Speed
MONITORING	Status
	Malfunction Flashing
	Malfunction Content
	Operation Mode
	Temperature Setting
	Permit/Prohibit Selection
	Fan Speed
CONTROL MANAGEMENT	Field Setting Mode
	Group Setting
	Auto Re-Start

SPECIFICATIONS OF CORD	
TYPE	2-core sheathed vinyl cord or cable
SIZE	AWG18-2

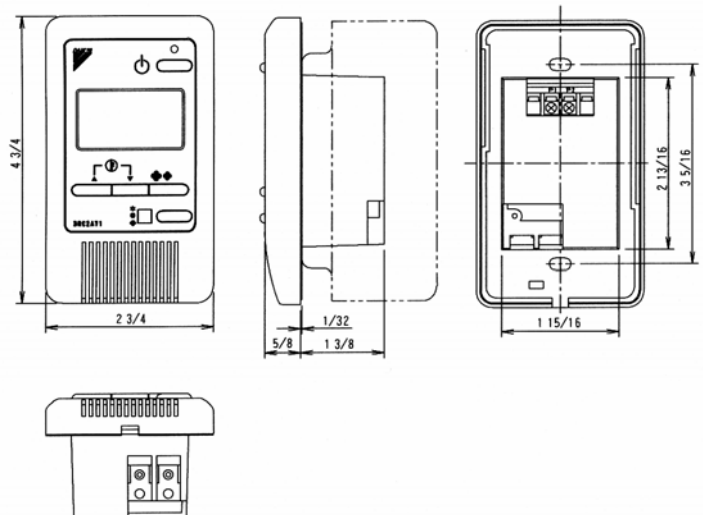

If used with FXFQ, FXAQ, FXNQ & FXLQ no louver function exists.