




**Submittal Data Sheet**

Down Flow Kit  
DFK-B/C/D



**DESCRIPTION**

The Down Flow Kit (DFK) prevents possible condensation from forming on the drain pan in the down flow application.

**SPECIFICATIONS**

Model No.:	DFK-B	DFK-C	DFK-D
Unit Compatibility:	FTQ18TAVJUA FTQ24TAVJUA FTQ30TAVJUA FTQ36TAVJUA FXTQ09TAVJUA FXTQ12TAVJUA FXTQ18TAVJUA FXTQ24TAVJUA FXTQ30TAVJUA FXTQ36TAVJUA	FTQ42TAVJUA FTQ48TAVJUA FXTQ42TAVJUA FXTQ48TAVJUA	FXTQ54TAVJUA FXTQ60TAVJUA
Thermal Conductivity	0.25 BTU-IN/HR. FT <sup>2</sup> °F		
Flame Spread and Smoke Index	25/50 in accordance with ASTM E84 CAN/ULC S102		
Water Absorption, % By Vol.	0.2% in accordance with ASTM C 209		
Upper Use Limit	180/220 °F		
Lower Use Limit	-297°F		
Material / Finish:	ARMAFLEX		

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056  
[www.daikinac.com](http://www.daikinac.com) [www.daikincomfort.com](http://www.daikincomfort.com)

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations).




## Submittal Data Sheet

Down Flow Kit  
DFK-B/C/D

### DIMENSIONAL DRAWINGS

Units in Inches (mm)

Kit Name	"A"	"B"	"C"
DFK-B	16.12" (410mm)	3.93" (100mm)	4.05" (103mm)
DFK-C	19.43" (494mm)	4.17" (106mm)	4.29" (109mm)
DFK-D	22.97" (584mm)	4.71" (120mm)	4.83" (123mm)

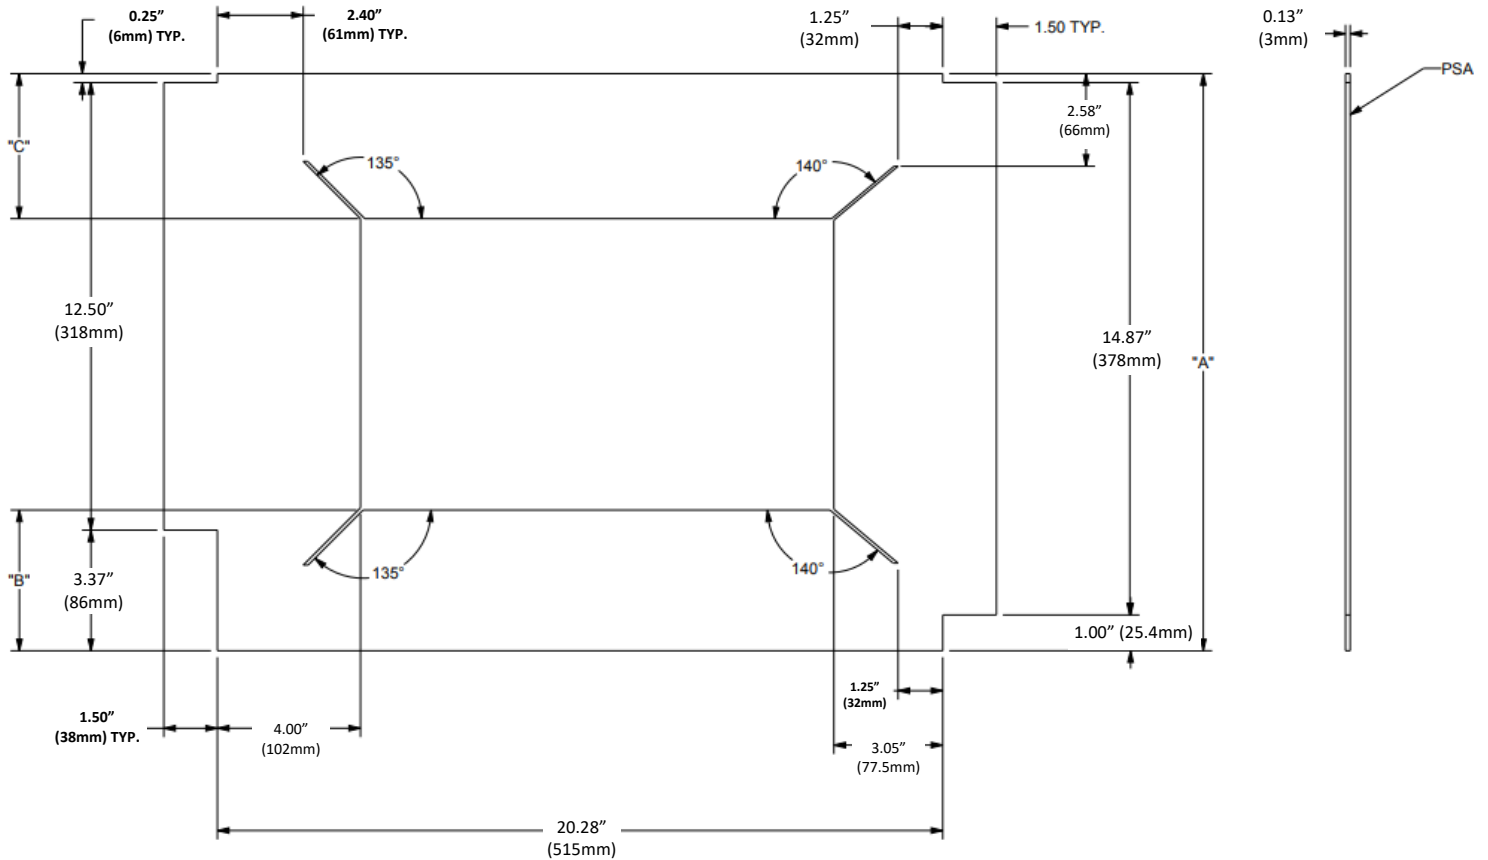

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056  
[www.daikinac.com](http://www.daikinac.com) [www.daikincomfort.com](http://www.daikincomfort.com)

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations).