

Submittal Data Sheet

2.0-Ton Wall Mounted Unit

INDOOR UNIT DETAILS

FXAQ24PVJU

PERFORMANCE			
Indoor Unit Model No.	FXAQ24PVJU	Indoor Unit Name:	2.0-Ton Wall Mounted Unit
Туре:	Wall Mounted	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Rated Cooling Capacity (Btu/hr):	24,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Sensible Capacity (Btu/hr):	18,000	Rated Piping Length(ft):	
Cooling Input Power (kW):	0.050	Rated Height Separation (ft):	
Rated Heating Capacity (Btu/hr):	26,500		
Heating Input Power (kW):	0.06		

Po	wer Supply (V/Hz/Ph):	208-230 / 60 / 1
Po	wer Supply Connections:	L1, L2, Ground

Power Supply Connections:	L1, L2, Ground	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	0.6	Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):	15	Liquid Pipe Connection (inch):	3/8
Dimensions (HxWxD) (in):	11-3/8 x 41-3/8 x 9-1/4	Condensate Connection (inch):	11/16
Net Weight (Ib):	31	Sound Pressure (H/L) (dBA):	47/41
Ext. Static Pressure (Rated/Max) (inWg):	1	Sound Power Level (dBA):	

Airflow Rate (H/L) (CFM):

635/470

www.daikinac.com www.daikincomfort.com


(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)



Submittal Data Sheet

2.0-Ton Wall Mounted Unit FXAQ24PVJU

DIMENSIONAL DRAWING

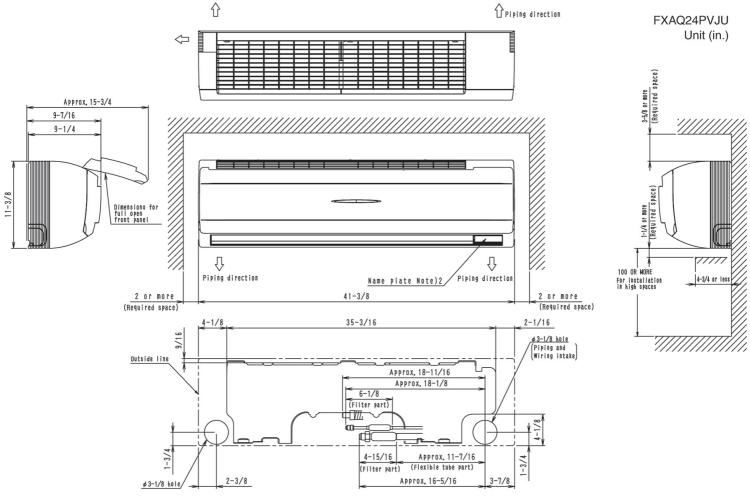

Mounting location

Daikin City Generated Submittal Data

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston, TX, 77056

www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)