



**Submittal Data Sheet**  
1.25-Ton MSP Concealed Ducted Unit  
FXSQ15TAVJU

PERFORMANCE			
Indoor Unit Model No.	FXSQ15TAVJU	Indoor Unit Name:	1.25-Ton MSP Concealed Ducted Unit
Type:	Ducted	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Rated Cooling Capacity (Btu/hr):	15,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Sensible Capacity (Btu/hr):	11,300	Rated Piping Length(ft):	
Cooling Input Power (kW):	0.162	Rated Height Separation (ft):	
Rated Heating Capacity (Btu/hr):	17,000		
Heating Input Power (kW):	0.16		



INDOOR UNIT DETAILS			
Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Airflow Rate (H/M/L) (CFM):	530/441/371
Power Supply Connections:	L1, L2, G	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	1.4	Gas Pipe Connection (inch):	1/2
Max Overcurrent Protection (MOP) (A):	15	Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	9-11/16 x 27-9/16 x 31-1/2	Condensate Connection (inch):	1
Net Weight (lb):	60	Sound Pressure (H/M/L) (dBA):	36/33/30
Ext. Static Pressure (Rated/Max) (inWg):	0.2 / 0.6	Sound Power Level (dBA):	64

## Submittal Data Sheet

1.25-Ton MSP Concealed Ducted Unit

FXSQ15TAVJU

## DIMENSIONAL DRAWING

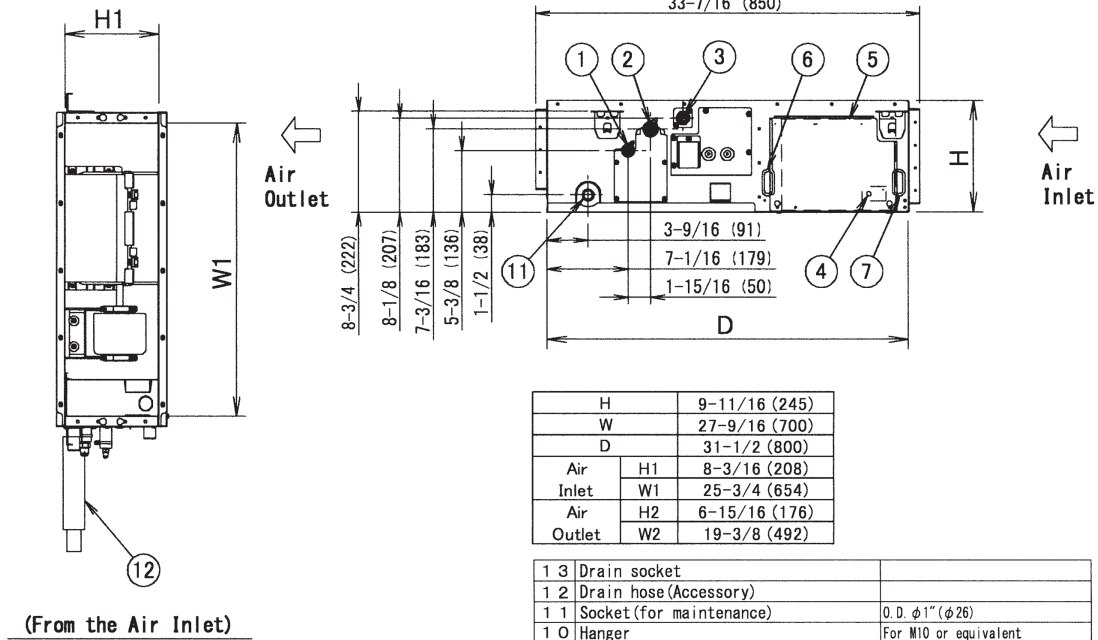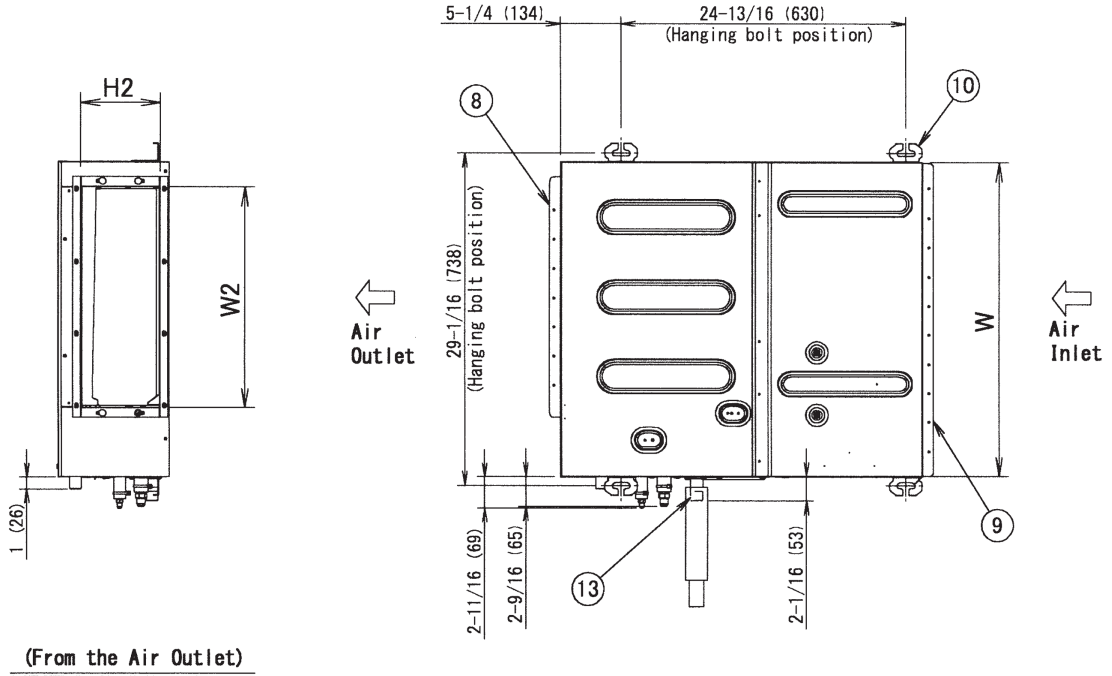

H	9-11/16 (245)
W	27-9/16 (700)
D	31-1/2 (800)
Air Inlet	H1 8-3/16 (208)
	W1 25-3/4 (654)
Air Outlet	H2 6-15/16 (176)
	W2 19-3/8 (492)

13	Drain socket	
12	Drain hose (Accessory)	
11	Socket (for maintenance)	O.D. $\phi$ 1" ( $\phi$ 26)
10	Hanger	For M10 or equivalent
9	Air Inlet flange	
8	Air Outlet flange	
7	Power supply wiring connection	
6	Transmission and remote controller wiring connection	
5	Control box (inside)	
4	Ground terminal (Control box)	M4
3	Drain pipe connection	O.D. $\phi$ 1-1/4" ( $\phi$ 32)
2	Gas pipe connection	$\phi$ 1/2" ( $\phi$ 12.7) Flare connection
1	Liquid pipe connection	$\phi$ 1/4" ( $\phi$ 6.4) Flare connection
ITEM	PART NAME	REMARK

Note: For additional dimensional data and clearance information, refer to Engineering Data