



Submittal Data Sheet

5.0-Ton Multi Position Air Handling Unit

FXTQ60TAVJUA

PERFORMANCE


Indoor Unit Model No.	FXTQ60TAVJUA	Indoor Unit Name:	5.0-Ton Multi Position Air Handling Unit
Type:	Ducted	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Rated Cooling Capacity (Btu/hr):	60,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Sensible Capacity (Btu/hr):	41,300	Rated Piping Length(ft):	
Cooling Input Power (kW):	0.680	Rated Height Separation (ft):	
Rated Heating Capacity (Btu/hr):	66,000		
Heating Input Power (kW):	0.68		

INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Airflow Rate (H/M/L) (CFM):	1800/1,530/1,260
Power Supply Connections:		Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	8.6/8.6	Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):	15	Liquid Pipe Connection (inch):	3/8
Dimensions (HxWxD) (in):	58 x 24.5 x 21	Condensate Connection (inch):	3/4
Net Weight (lb):	167	Sound Pressure () (dBA):	
Ext. Static Pressure (Rated/Max) (inWg):	/ 0.9"	Sound Power Level (dBA):	

Submittal Data Sheet
 5.0-Ton Multi Position Air Handling Unit
 FXTQ60TAVJUA

DIMENSIONAL DRAWING

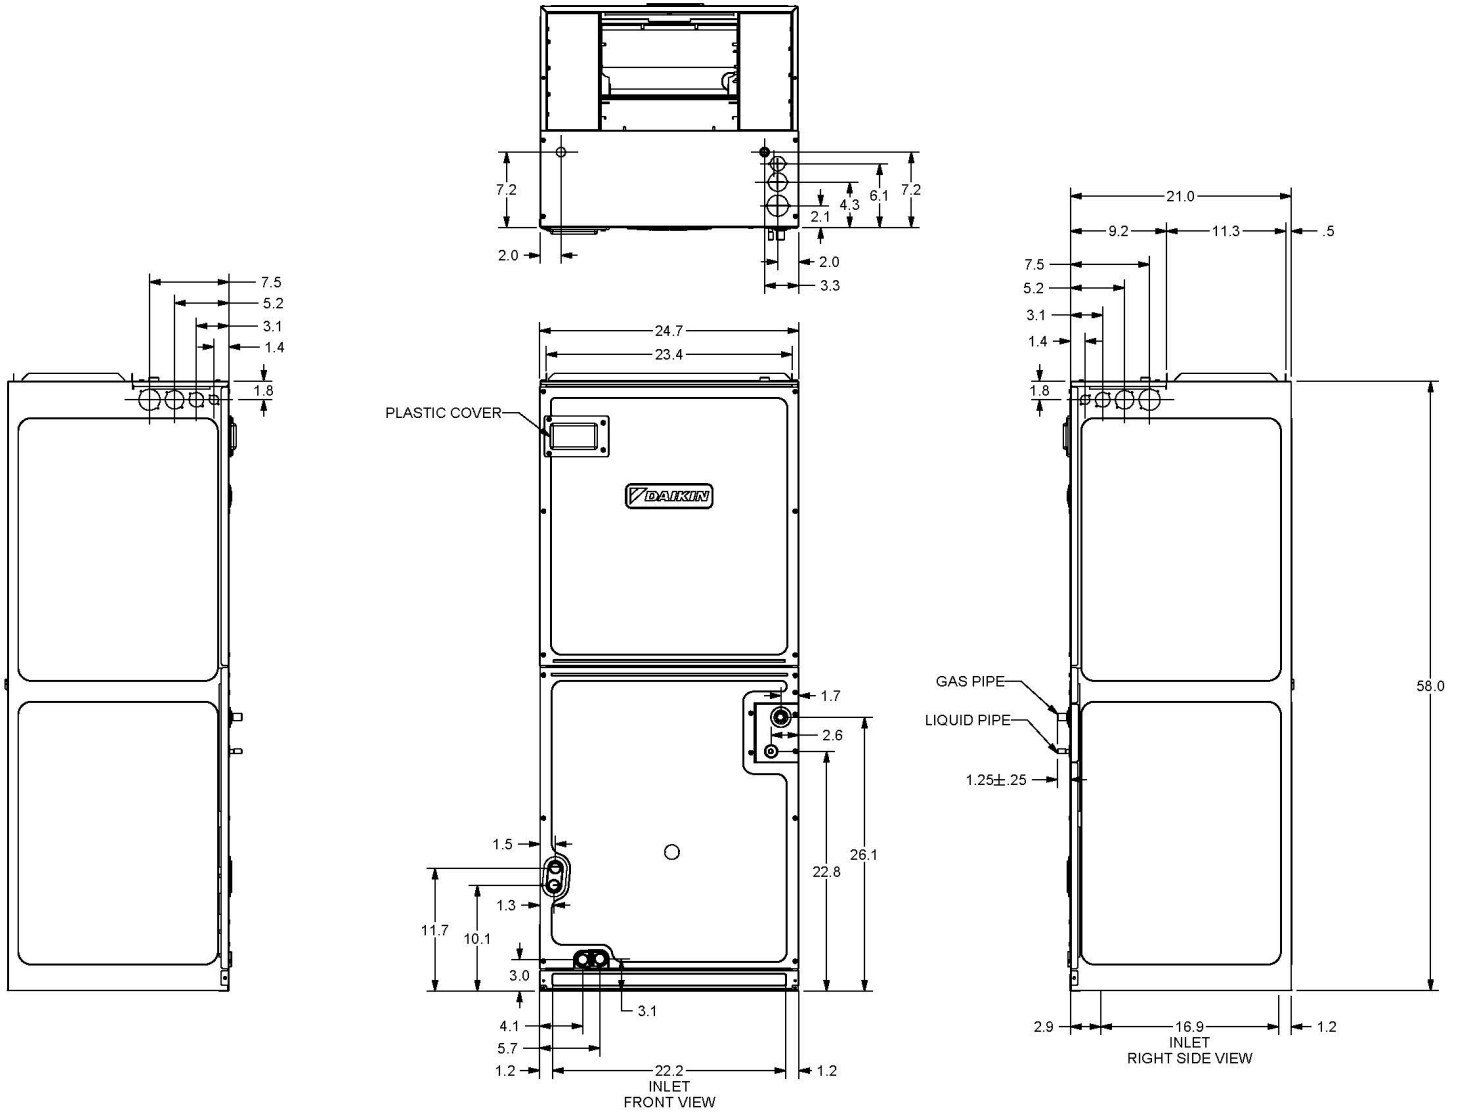

FXTQ54/60 TAVJU