

Submittal Data Sheet

1.5-Ton Multi Position Air Handling Unit FXTQ18TAVJUA

PERFORMANCE			
Indoor Unit Model No.	FXTQ18TAVJUA	Indoor Unit Name:	1.5-Ton Multi Position Air Handling Unit
Туре:	Ducted	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Rated Cooling Capacity (Btu/hr):	18,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Sensible Capacity (Btu/hr):	12,700	Rated Piping Length(ft):	
Cooling Input Power (kW):	0.220	Rated Height Separation (ft):	
Rated Heating Capacity (Btu/hr):	20,000		
Heating Input Power (kW):	0.22		

INDOOR UNIT DETAILS			
Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Airflow Rate (H/M/L) (CFM):	600/510/420
Power Supply Connections:		Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	4.9/4.9	Gas Pipe Connection (inch):	1/2
Max Overcurrent Protection (MOP) (A):	15	Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	45 x 17.5 x 21	Condensate Connection (inch):	3/4
Net Weight (Ib):	115	Sound Pressure () (dBA):	
Ext. Static Pressure (Rated/Max) (inWg):	/ 0.9"	Sound Power Level (dBA):	

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston, TX, 77056


www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)



Submittal Data Sheet 1.5-Ton Multi Position Air Handling Unit FXTQ18TAVJUA

DIMENSIONAL DRAWING

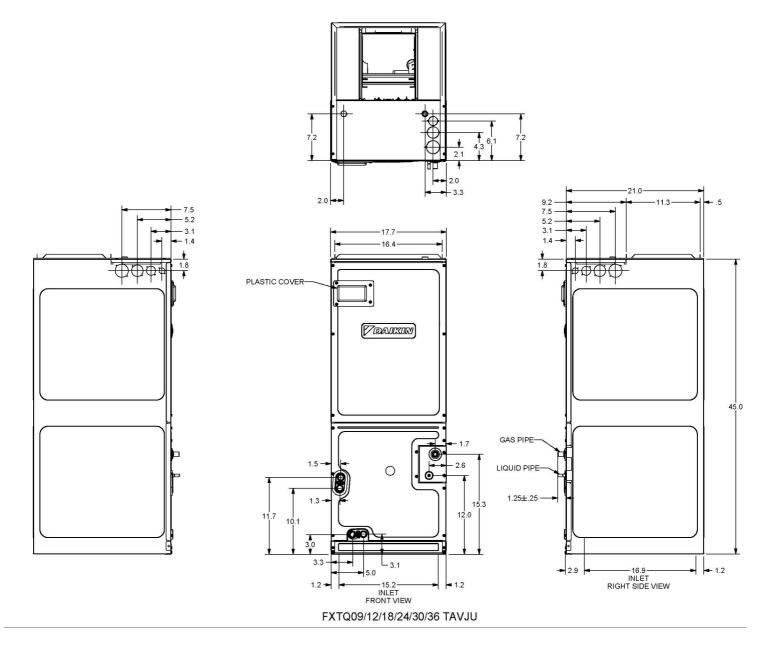

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston, TX, 77056

www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)